

DATA SHEET

FLOOR-STANDING MACHINE MAX-F 50



TECHNICAL DATA



Inner chamber dimensions	530 x 545 x 180 mm*
External dimensions	650 x 700 x 1000 mm*
Seal length	500 mm
Vacuum pump	25 m ³ /h 40 m ³ /h XL** 63 m ³ /h
Control system	Z 3000
Weight	112** kg 125 kg 145 kg
Power supply	3 phases, 230 / 400 V, 50 Hz***




* width x depth x height
 ** equipped with a Becker pump
 *** special voltages on request

All dimensions are approximate.
 We reserve the right to make technical changes and improvements without notice.

INSPIRING VACUUM TECHNOLOGY

- Perfect finish
- Easy handling
- Precise control system
- Maximum durability
- Wide range of applications
- 99% vacuum
- Proof and reliable sealing
- Simple cleaning
- Service-friendly

MACHINE STRUCTURE



Cover closing mechanism



Insertion plates for volume reduction and height regulation



Cable-free sealing system



High-quality, stable acrylic lid

Protected suction unit

Stainless steel design

Programmable sensor control system Z 3000 incl. high pressure seal

Mobile, plug-and-play unit with integrated vacuum pump

Four robust stainless steel rollers of which two are lockable

CONTROL SYSTEM


Our Z 3000 sensor control system in splash proof design is equipped with a precision vacuum sensor and allows precise setting of important operating parameters: vacuum, gas and sealing.




Benefits:

- 99-program memory
- Break function for immediate process cancellation
- H₂O sensor for automatic packaging of liquid products
- Quick-stop function for packaging of liquids
- Variable step vacuum for slow degassing products
- Cyclic vacuum permits multiple flushing of the bag
- „Red Meat“ program for shrink bag packaging
- Continuous running – service program for automatically cleaning the vacuum pump
- Separate selectable sealing bars
- Individual setting of cooling, pressing on and back ventilation times
- Operating hours counter for monitoring service intervals


Ultimate pressure controlled evacuation with auto-stop function

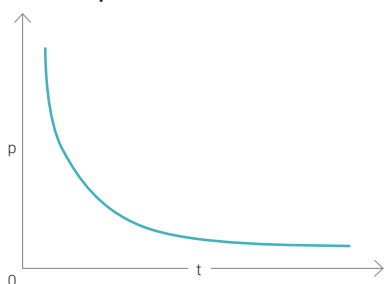

Variable step vacuum

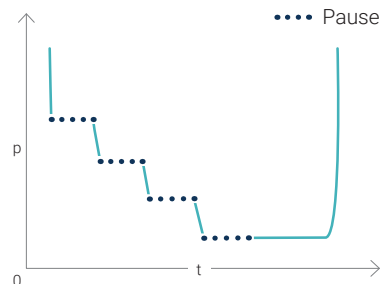

High pressure seal

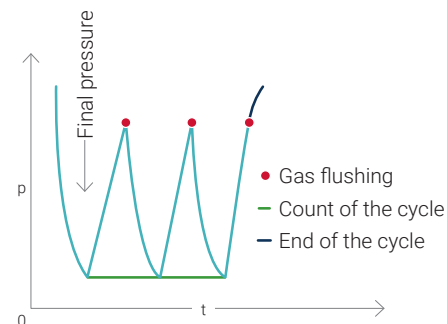

VACUUM PUMP

Our Boss vacuum packaging machines are equipped with powerful oil-lubricated rotary vane vacuum pumps made by companies Busch or Becker.

Technical data	Busch		Becker
Nominal pumping speed	25 m ³ /h	63 m ³ /h	40 m ³ /h XL
Ultimate pressure (mBar)	0,1	0,1	1
Nominal motor rating (kW)*	~ 0,75	~ 1,5	~1,1
Nominal motor speed (U/min)	1500	1500	2800
Noise level (ISO 2151) (dB)	62	65	67
Oil capacity (liter)	1	1	1

* depends on the voltage supply




German made





SEALING SYSTEMS


Double sealing




Simple cut-off sealing



Double flat wire:
6 x 0,3 mm



Round wire: 1,2 mm Ø
Flat wire: 4 x 0,2 mm



ACCESSORIES

1. Gas flush device with 3 nozzles
2. Slanted bag holder for packaging of liquids (stainless steel)
3. Sucking device for standardized catering boxes
4. Slow air release
5. Stainless steel lid (usable height 185 mm)
6. Top/bottom welding (only available in combination with stainless steel lid)
7. Inspection glass in the lid (only available in combination with stainless steel lid)
8. Set of wearing parts (teflon, wire, lid gasket, silicone for pressure bar)
9. Packaging (stable cardboard box on wooden pallet)

