

MAX-F 50 D


CAN SEALING MACHINE

Technical data

Internal chamber dimensions	530 x 545 x 180 mm*
External dimensions	650 x 700 x 1000 mm*
Seal length	500 mm
Vacuum pump	25 m ³ /h or 63 m ³ /h
Weight	125 kg or 145 kg
Power supply	3 phases 230 / 400 V, 50 Hz**

* width x depth x height
 ** special voltages upon request

Configurations



4 cans
à 500 g

6 cans
à 250 g

8 cans
à 100 g

10 cans
à 50 g

Seal welding system
(Seal welding optional)



BOSS quality characteristics

made in Germany



Longevity

BOSS vacuum machines are made exclusively with high-quality individual components: rust-free stainless steel, splashproof elements and Busch high-performance pumps - 100% Made in Germany. Clear structure, robust technology and sophisticated design guarantee long-lasting operational readiness.



User-friendliness

Our intuitive Z 3000 sensor control system permits simple and precise setting of important operating parameters. Pre-set values can be recalled via the memory function. The well-thought-out and ergonomic construction of the machines permits user-friendly working and guarantees optimum packaging results.



Seal welding

The perfect synergy of contact pressure, seal welding temperature and seal welding time produces optimum fusing results. Our high-pressure seal welding systems ensure consistent sealing results even with thicker types of bag. The bag overlap is cut off in order to avoid unnecessary bacterial exposure. The machine can be optionally equipped with double seam welding.



Service & Cleaning

Ease of cleaning is foremost in the design of our machines. They are made of stainless steel. The vacuum chambers are easy to clean and the sealing systems cable-free. In order to reduce service costs and avoid downtimes due to maintenance, we attach great importance to easy accessibility and the clear arrangement of individual components. A service programme supports the functionality of the vacuum pump.

Machine structure



Lid and chamber

The stainless steel vacuum chamber is designed to be easy to clean. The lid is made of high-quality acrylic and permits permanent process monitoring.

Chamber



Benefits

- Cable-free seal welding systems
- Smooth surfaces
- Stainless steel execution


Shelves



Benefits

- Optimum shelf height
- Minimisation of the chamber volume
- Shortening of the evacuation time
- Grip hole for simple handling
- Consisting of robust, food-safe PE materials
- Rounded edges for safe handling
- Dishwasher-safe

Acrylic lid

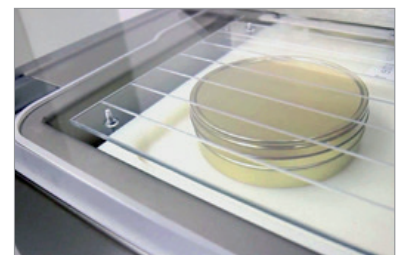

Benefits

- Non-slip surface
- Flat and curved versions available
- Easy-clean silicone holder
- Silicone lip seal for smooth lid closure

Control system

Control system Z 3000


Our Z 3000 sensor control is equipped with a precision vacuum sensor and permits precise setting of important operating parameters. Vacuum, gas and sealing.




Benefits

- User-friendliness
- 99-programme memory
- Clear depiction of individual parameters
- Break function for immediate process cancellation
- H2O sensor for automatic packaging of liquid products flexibly adjustable according to customer requirements
- Quick-stop function for packaging liquids
- Incremental vacuum function for slowly degassing products
- Cyclic vacuum permits multiple flushing of the bag
- Red Meat programme for shrink bag packaging
- Continuous running - service programme for automatically cleaning the vacuum pump
- Separately adjustable cut-off welding systems
- Splashproof design
- Soft-air function for gentle back ventilation (optional)
- Individual setting of cooling, pressing on and back ventilation times
- Operating hours counter for monitoring service intervals


Final pressure evacuation with auto-stop function



Incremental vacuum


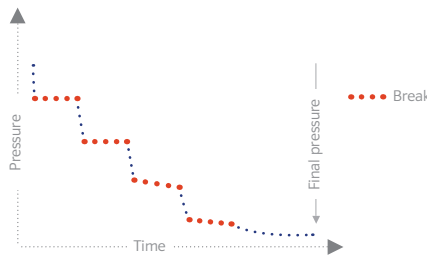


Cyclic vacuum

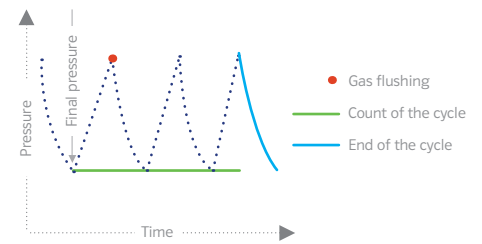


Seal welding


Double seam weld




Double flat wire: 6 x 0,3 mm



Simple cut-off seal weld




Round wire: 1,0 mm Ø
Flat wire: 4 x 0,2 mm



BUSCH vacuum pump

Our BOSS vacuum packaging machines are fitted with powerful oil-driven rotary disc vacuum pumps made by the Busch Company.

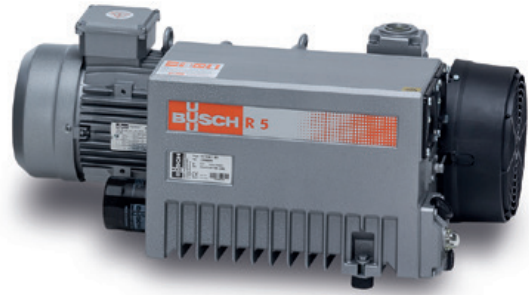

Benefits

- Reduction of oxygen content by up to max. 0.1%
- Constant high vacuum level
- Optimum conservation of moisture-sensitive and/or oxygen-sensitive products
- Long-term replacement part guarantee
- Service-friendly design
- Technically mature, long-life technology
- Made in Germany
- Gas ballast valve for the evacuation of larger quantities of steam

Technical data

Nominal pumping speed	25 m ³ /h	63 m ³ /h
Ultimate pressure (mBar)	0,1	0,1
Nominal motor rating (kW)*	~ 1	~ 2
Nominal motor speed (U/min)	1500	1500
Noise level (ISO 2151) (dB)	60	64
Oil capacity (liter)	1	1

* depends on the voltage supply

Accessories

1. Gassing unit with 3 nozzles
2. Soft ventilation
3. Pump 25 m³/h, 1 phase, 230 V, 50 Hz or higher performance vacuum pump with 63 m³/h, 3 phases, 230/400 V, 50 Hz
4. Suction device for standardized catering boxes
5. Set of wearing parts (teflon, wire, lid gasket, silicone for pressure bar)
6. Verpackung (Holzpalette mit stabilem Karton)
7. Packaging (stable cardboard box on wooden pallet)

